
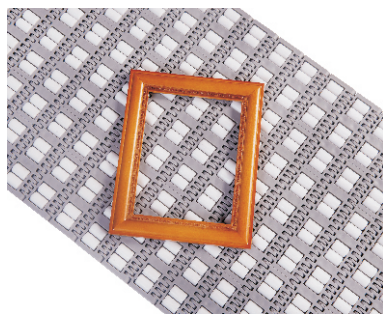
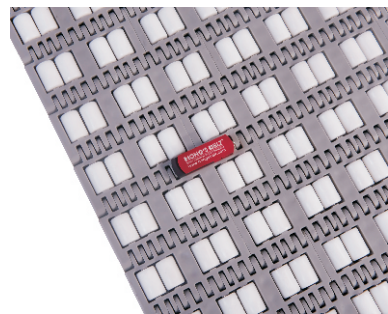


HS-3900C-N Technical Data Sheet

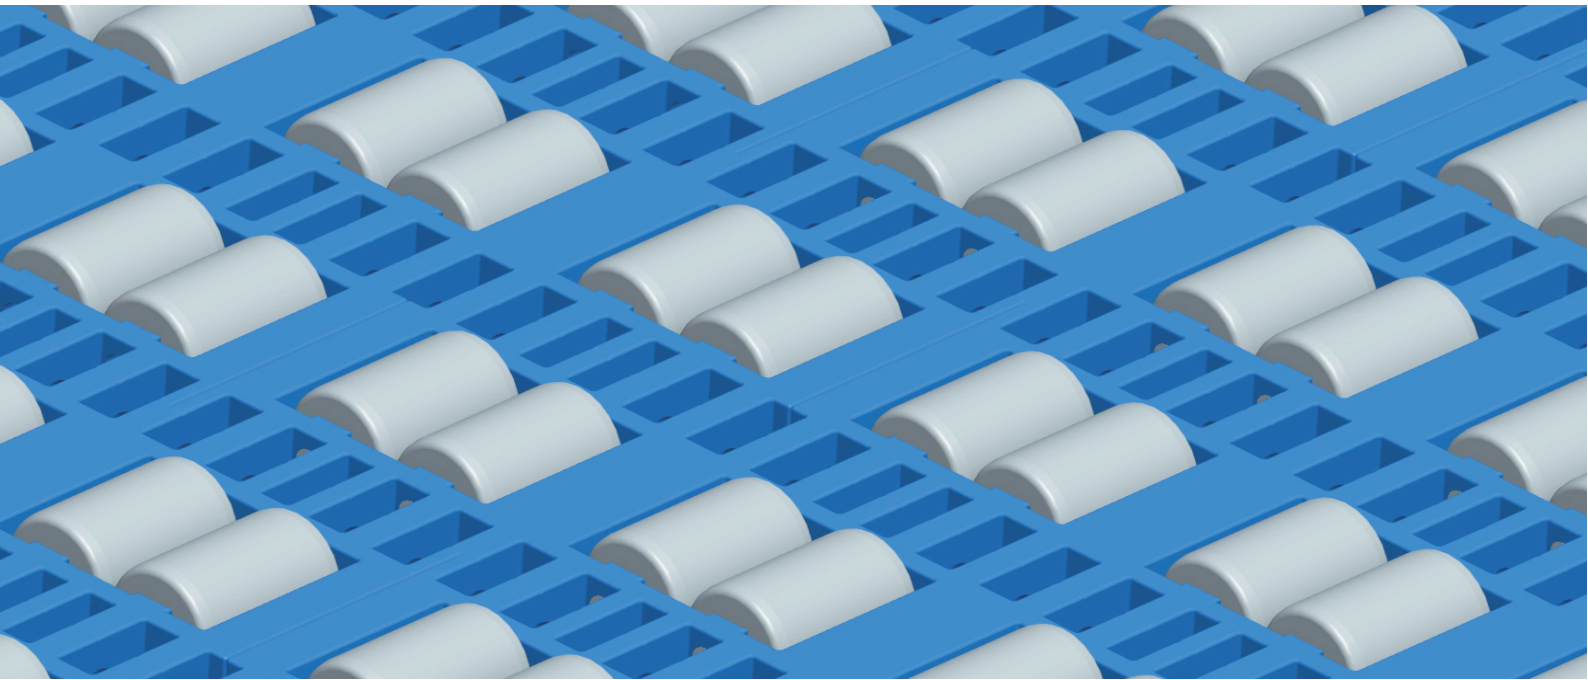

Pitch: 50.8mm Minimum Width: 254mm Open Area: 14% Approved: FDA Rod: Ø 5.8mm Flight: No Side Guard: No Curve: No	
---	--

Data

Belt Material	Belt Strength			Temperature		Belt Weight (Kg/M ²)
	Straight		Curve	°C (min.)	°C (max.)	
	Kg/M(BW)	N/M(BW)				
Polypropylene	3850	38500	--	1	100	15
Polyethylene	2860	28600	--	- 60	60	--
Acetal	5236	52360	--	- 40	80	22
HK	4760	47600	--	- 40	80	21

BW – Belt Width

Color Table

Polypropylene					Polyethylene					Acetal				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●					●		●

W-White,G-Gray,N-Nature,DB-Darkbrown, B-Blue

Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28

SUS – Stainless Steel

Equivalent type with other Brand

Brand Name	Intralox	UNI	Rexnord	MCC	Habasit	KVP
Series & Type	200	DPB	2000	2000	M5000	620
	400	SNB	2010	--	M5100	--
	800/850	MPB	6390	--	--	--


The above content is only for reference.

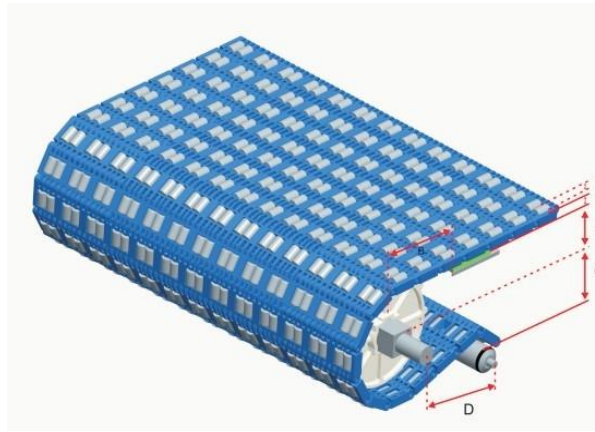

Conveyor Frame Dimensions

Unit : mm

No. Teeth	A (Min.)	B (Min.)	C (Max.)	D (Min.)	T	T1
6	37.5	55.5	33.5	200	16	4
8 / 8-Split	56.5	74.5	52.5	250		
10	72	90	68	250		
12	90	108	86	300		
13	100.2	118.2	96.2	300		
16	121.75	139.75	117.75	300		
17	130	148	126	300		

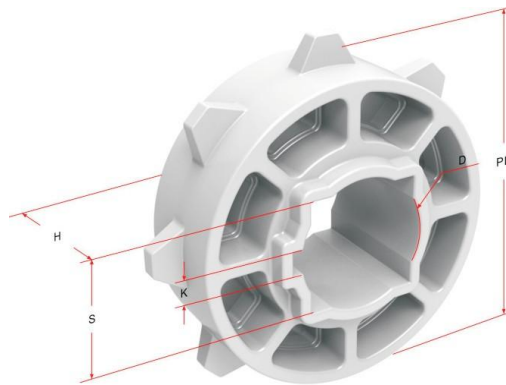

Sprocket Dimensions

Unit: mm

No. Teeth	PD	S	D	H	K
6	91	38.5	--	38	--
8	129	35.5/40.5	--	38	--
8-Split	129	38.5/40.5	--	38	--
10	160	38.2/40.2/40.5/50.2/60.2/70.5	47.5	38	8×8
12	196	38.5/40.5/50.5/60.5/63.5/70.5	40	38	12×8
13	216.4	60.2	--	38	--
16	259.5	60.5/80.5/90.5	--	49	---
17	276	120	--	48.5	--